

Non-maintained / Maintained

# Emergency Bulkhead Lighting Enclosure

K10001 / K10002



## Key Features

Attractive and tough slim line design.


- To ease installation the fittings have a hinged gear tray.
- The IP65 rated units are provided with grey base, prismatic diffuser and include 8W TS lamp.
- Non-maintained & maintained options.
- Screw down diffuser IP6S.
- Base and diffuser unmanufactured in tough, vandal resistant polycarbonate.
- 5 x 20mm knock outs for additional functions.
- 8W TS fluorescent lamp included.
- Designed BS EN 60598-2-22 IL Emergency lumens = 110 lumens
- Ballast lumen factor = 0.24

## Overview

The emergency bulkhead is designed to be both compact and tough, making it suitable for a variety of applications, both external and internal.

- Public buildings & car parks
- Industrial facilities & factories
- General lighting of stairwells
- Canopies or corridors

## Product Dimensions

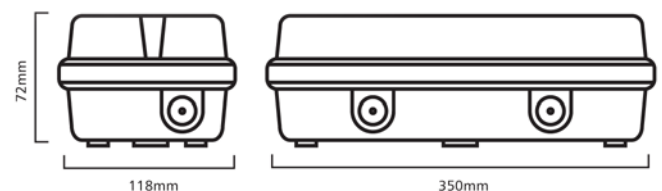

Model	K10001	K10002
Mode	Non-maintained	Maintained
Duration	3 hours	
Input voltage	230-240V - 50Hz	
Circuit Watts	8W	
Battery Type	High temp Ni-Cd battery	
Recharge Time	24 hours	
Temp Range	-10°C to +40°C	



**Illumino Ignis Ltd**

LIGHTING & FIRE DESIGN, SUPPLY & SUPPORT

t.0203 00 44 855 f.0203 00 44 866 email [sales@illuminoignis.co.uk](mailto:sales@illuminoignis.co.uk)

Unit 8, Tower Square, Tower Close, Huntingdon, PE29 1DT

[www.illuminoignis.co.uk](http://www.illuminoignis.co.uk)